


SCT CONFIDE

---

|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |

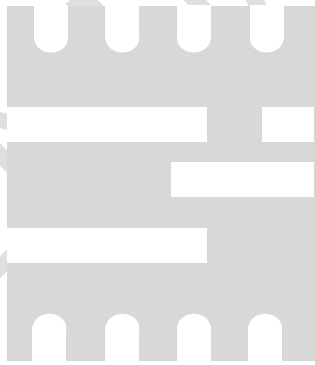

SCT CONFIDENTIAL


---

SCTC



|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |

SCT CONFIDENTIAL

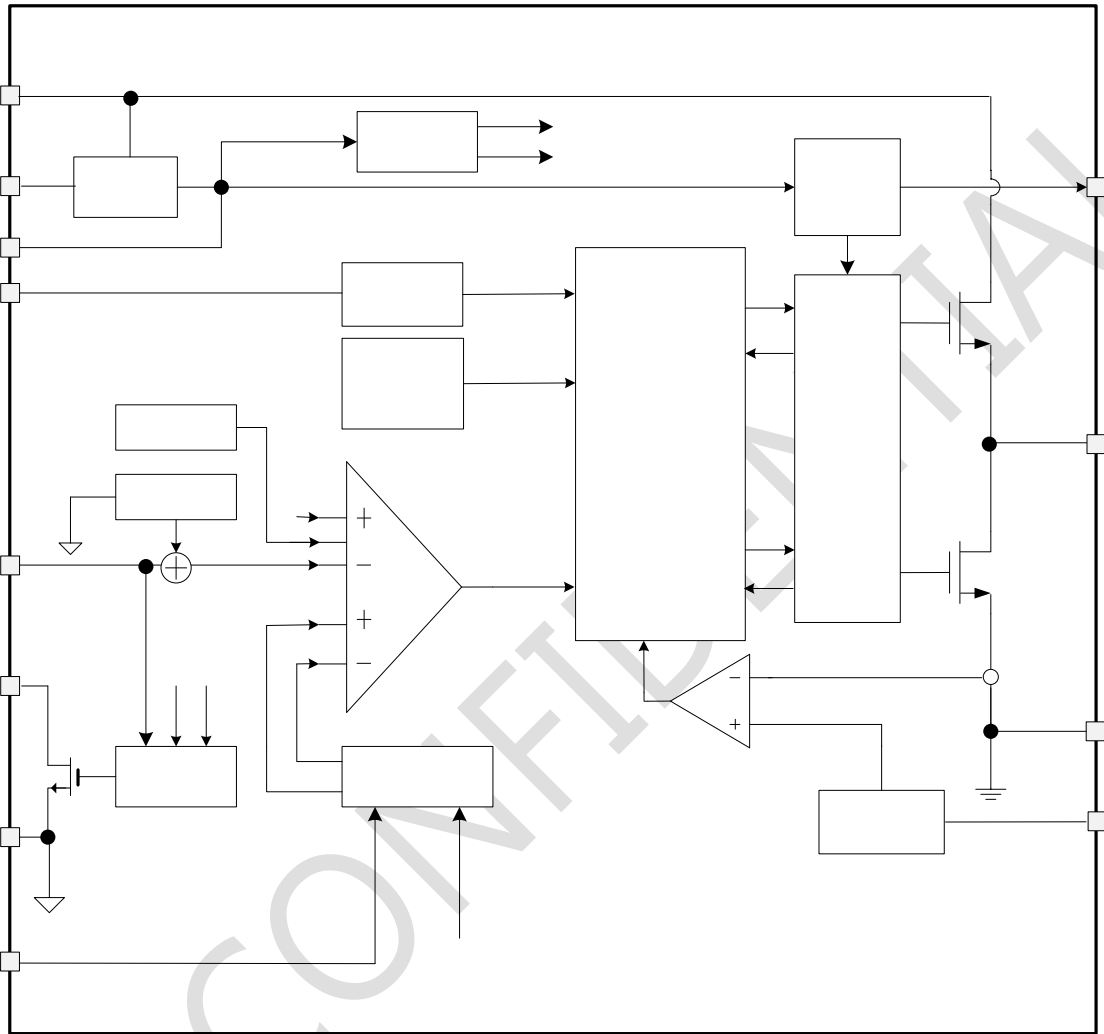

---

SCT CONFIDENTIAL

Ω



SCTCO

---

SCT CONFIDENTIAL

---







SCT CONFIDENTIAL

---

SCT CONFIDENTIAL


SCTC

SCT CONF

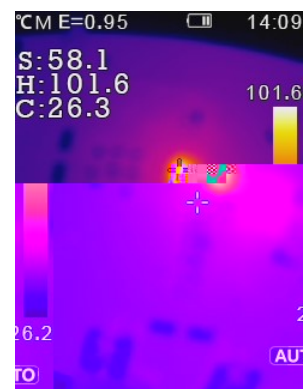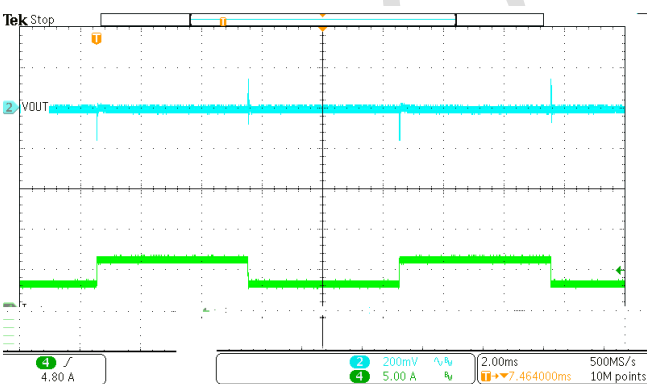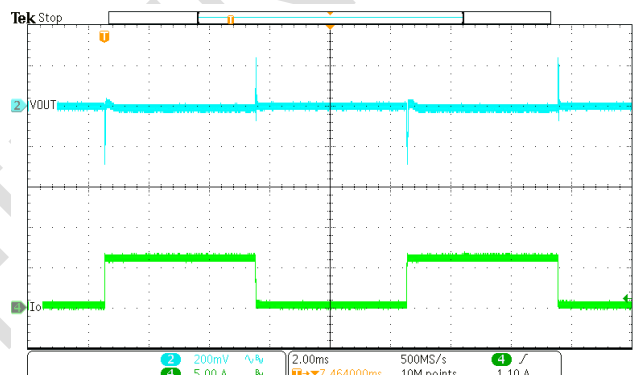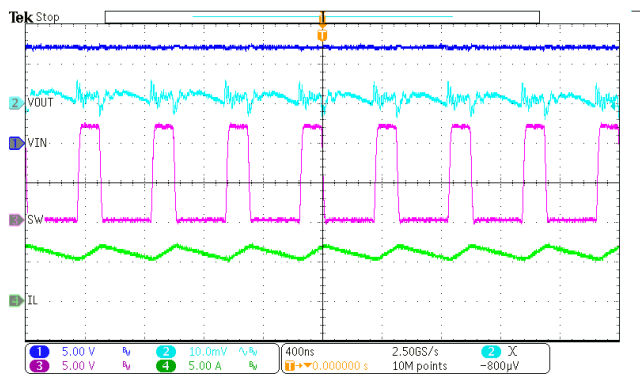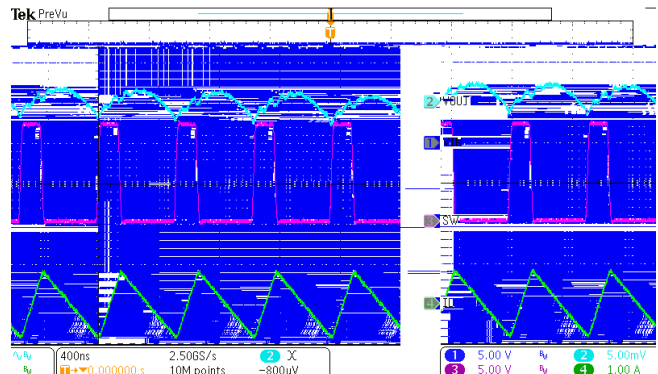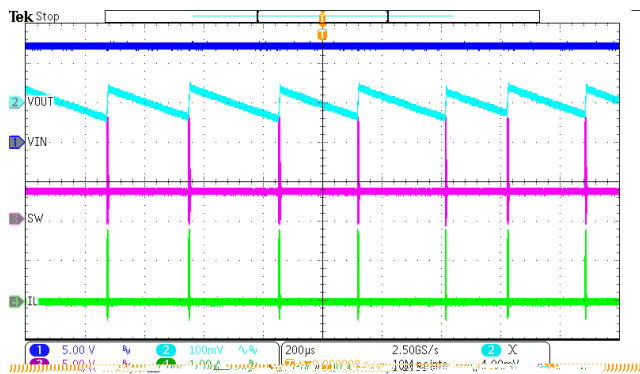


---

The bottom layer is a large ground plane connected to the ground plane on top layer by vias it is recommended 8mil diameter drill holes of thermal vias, but a smaller via offers less risk of solder volume loss. On applications where solder volume loss through the vias is of concern, plugging or tenting can be used to achieve a repeatable process.

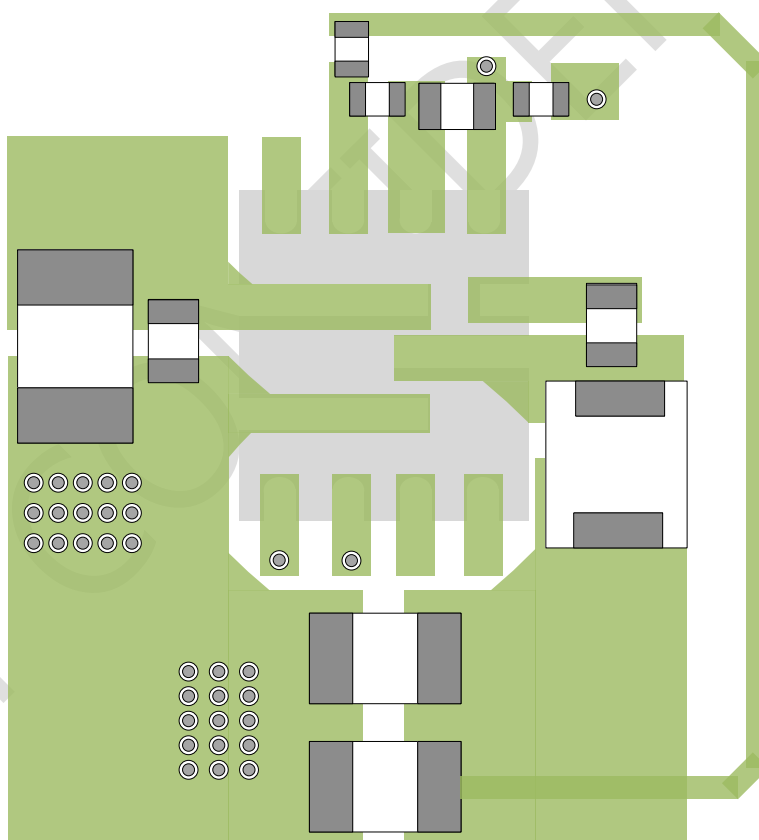



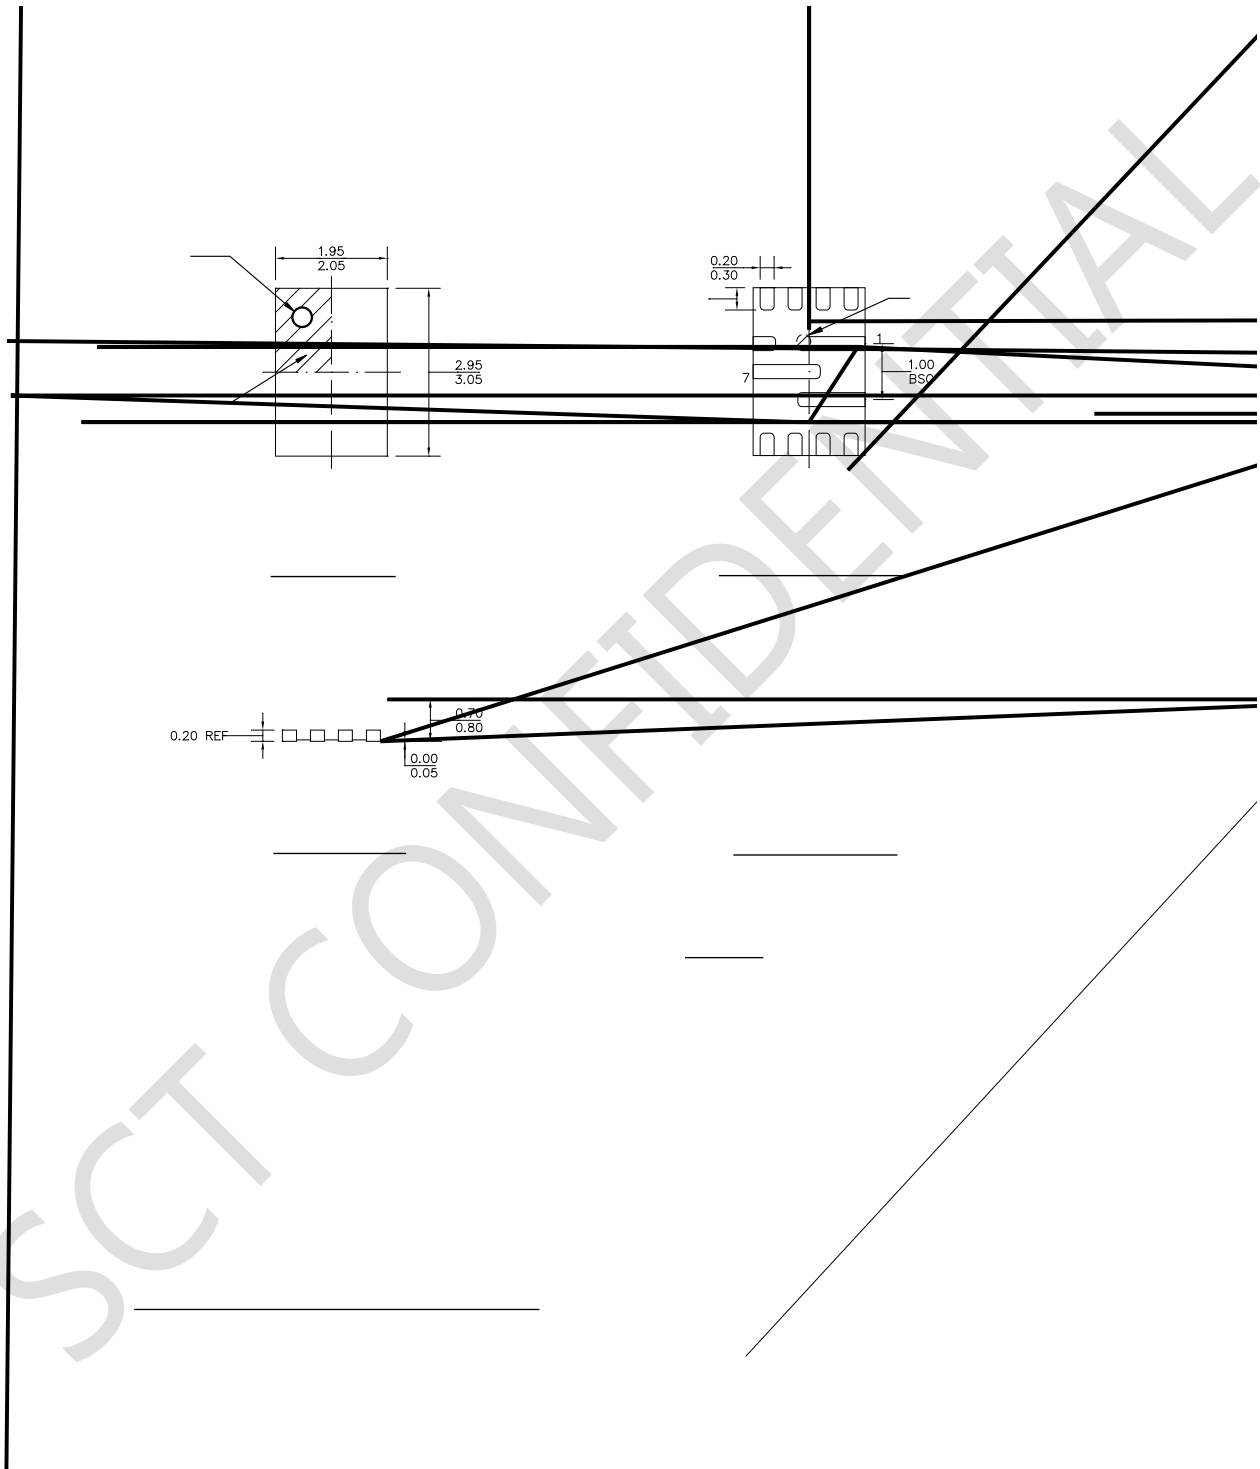

---

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |

---